

VILTROX® 唯卓仕

EF-GFX 自动对焦转接环



感謝您選用唯卓仕轉接環！

* 在把唯卓仕轉接環安裝到您的相機上前，請仔細閱讀本說明書，以便能夠了解和使用轉接環的全部功能。

產品功能

唯卓仕EF-GFX轉接環是一款可將佳能EF鏡頭轉接至富士GFX中畫幅機身，內置金屬電子触点，卡口均採用金屬打造，表面電鍍處理、堅固耐用，AF自動對焦，可通過USB接口進行固件升級。

在使用此轉接環之前，請確保相機與鏡頭兼容。使用本轉接環前，請詳細閱讀使用說明書，使您對產品更熟悉並掌握正確的操作方法，請務必妥善保管好本說明書，以便日後能隨時查閱。

注意事項

1. 安裝卡口轉接環至鏡頭，將設置從MF模式轉換到AF模式后，如果不能自動對焦，請重啟相機。
2. 將此轉接環連接至鏡頭並不會影響鏡頭的性能。
3. 請使用鏡頭上的開關來設置鏡頭功能，如果相機菜單中的設置與鏡頭上的設置不同，則應以鏡頭上的設置為準。
4. 當您使用的鏡頭比相機還要重時，在移動相機及進行拍攝時請務必握住鏡頭。
由於鏡頭的最小對焦距離在連接此轉接環時將會增加，因此最大放大倍率和視野範圍可能會改變。

部件名稱

EF鏡頭安裝標記

EF-S鏡頭安裝標記

鎖定銷


鏡頭釋放桿

觸點(鏡頭端)


觸點(相機端)

USB升級接口

相機安裝標記

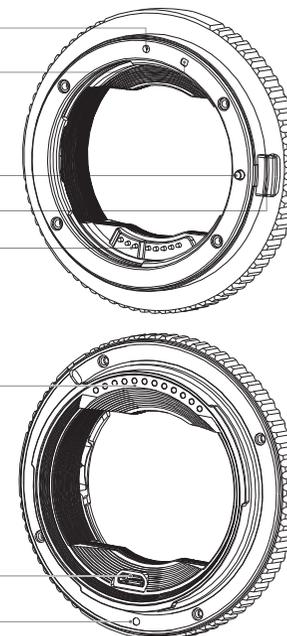

安裝轉接環

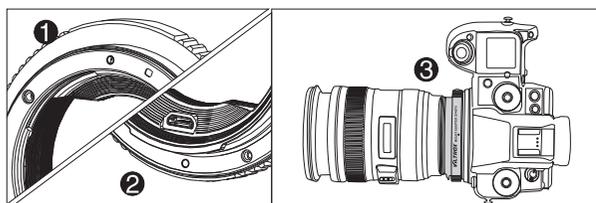

安裝產品

1. 將EF鏡頭安裝到EF轉接環上的安裝槽

將EF鏡頭上的安裝標記(紅色圓圈)對準轉接環上的相同標記，然後，以順時針方向轉動EF鏡頭直到聽到喀一聲為止(1)，將EF-S鏡頭安裝到轉接環時，請對準EF-S安裝標記(白色方塊)將鏡頭插入轉接環，然後以順時針方向轉動(2)。

2. 將轉接環安裝到相機

將轉接環上的安裝標記(紅色圓圈)對準相機上的相同標記，將轉接環裝入相機，然後以逆時針方向轉動轉接環，聽到喀一聲為止(3)。

卸載產品

1. 關閉相機電源，然後將仍安裝著EF鏡頭的轉接環從相機取下，按住相機的鏡頭釋放按鈕，同時以逆時針方向轉動轉接環。在轉接環停止轉動時將其取下。

2. 將EF鏡頭從轉接環取下

按下轉接環上的鏡頭釋放桿，同時以逆時針方向轉動EF鏡頭，在EF鏡頭停止轉動時將其取下。

固件升級安裝：

1. 使用USB線將接環連接到電腦
2. 新硬盤 "Adapter FX" 會在電腦中出現
3. 從www.viltrox.com下載最新固件
4. 將文件解壓，並把*.vtx文件複製到"Adapter FX"內
5. 將接環從電腦分離，固件更新完成

產品規格

兼容鏡頭	佳能EF/EF-S系列鏡頭
兼容相機	富士GFX中畫幅相機
對焦模式	自動對焦
固件升級	USB升級接口
最大直徑及長度	79mm × 24mm
重量	約85克(不含蓋子)

深圳市爵影科技有限公司
www.viltrox.com
深圳市 龍華區 大浪街道 下嶺排村 寶坤科技工業園4棟2樓

VILTROX®

EF-GFX MOUNT ADAPTER



Thank you for choosing Viltrox mount adapter !

* Before setting the Viltrox mount adapter on your camera, please read this manual carefully for your proper or better use of the adapter.

Function


Viltrox EF-GFX Mount Adapter allows Canon EF lenses to be mounted perfectly on Fuji GFX-mount med-format cameras. It is with inbuilt electronic contacts and the bayonets are made of metal with surface plating treatment, being durable and sturdy. It also features AF function. Firmware can be upgraded by a USB port.

Make sure the camera is compatible with the lens before using the adapter. Please read the manual carefully so that you can know more about proper operations before using the product. Please keep this instruction manual in a safe place for future reference.


Attentions

1. After mounting the adapter on the lens and setting the MF mode to AF mode, if autofocus still doesn't work, please restart the camera.
2. The lens performance won't be affected with the adapter mounted.
3. Please use the switch on the lens to set the lens function.
If the settings in camera menu differ from those on the lens, settings on the lens shall prevail.
4. When the lens you use is much heavier than the camera, be sure to hold the lens when moving the camera or shooting.
Since the minimum focusing distance will increase with the adapter mounted, the maximum magnification and field of view may change.

Name of each part

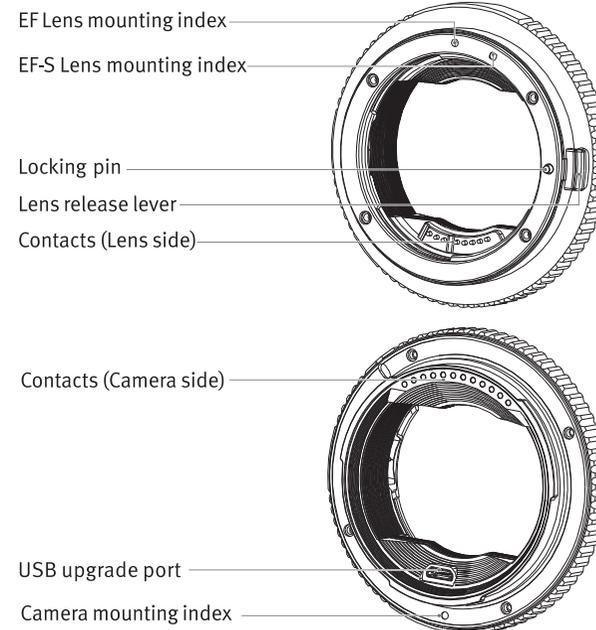

Mounting and Detaching the Adapter

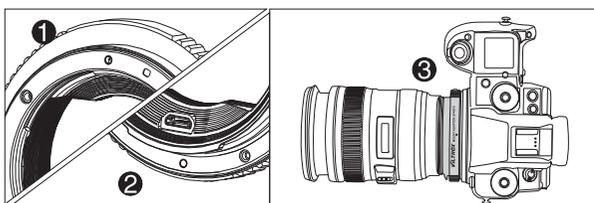

Mounting procedures

1. Attach the EF lens to the EF mounting groove of the adapter.

Insert the lens into the adapter by aligning the mounting index on the EF lens (red dot) with the same mark on the adapter, and turn the EF lens clockwise until you hear a click. (fig. ①)

When attaching an EF-S lens, align the mounting index marks (white squares) and turn the lens clockwise. (fig. ②)

2. Mount the adapter to the camera.

Insert the adapter into the camera by aligning the Fuji X-mount lens mounting index on the adapter (Red dot) with the same mark on the camera, and turn the adapter counter-clockwise until you hear a click. (fig. ③)

Detaching procedures

1. Turn the camera OFF, and detach the adapter from the camera while the EF lens is still attached to it.

Turn the adapter counter-clockwise to the end while pushing the camera lens release button, then detach the adapter from camera.

2. Detach the EF lens from the adapter.

Turn the EF lens counter-clockwise to the end while pushing the lens release lever on the adapter, then detach the lens from the adapter.

Attention: Do not attach camera or lens when update adapter firmware.

Update procedure:

1. Connect adapter to computer with USB cable.
2. A new drive "Adapter FX" will appear in your computer.
3. Download latest firmware from www.viltrox.com.
4. Unzip and copy the *.vtx file to "Adapter FX".
5. Disconnect the adapter from computer and firmware update complete.

Specifications

Compatible lenses	Canon EF / EF-S series lenses
Compatible cameras	Fuji GFX-mount med-format cameras
Focus mode	Auto focus
Firmware upgrade	USB upgrade port
Diameter and Length	79mm × 24mm
Weight	Approx. 85 g (excluding cap)

Shenzhen Jueying Technology Co.,Ltd. www.viltrox.com
2/F,Blk 4, Baokun Science and Technology Industrial Park, Xialingpai,
Dalang Str.,Longhua,Shenzhen,China